

# Viscolite VL700-T15



## small-sample portable viscometer

innovators in fluid measurement

**Hydramotion**

### Features

- ▶ convenient hand-held design
- ▶ small sample measurement
- ▶ simple operation & cleaning
- ▶ no moving parts — no maintenance

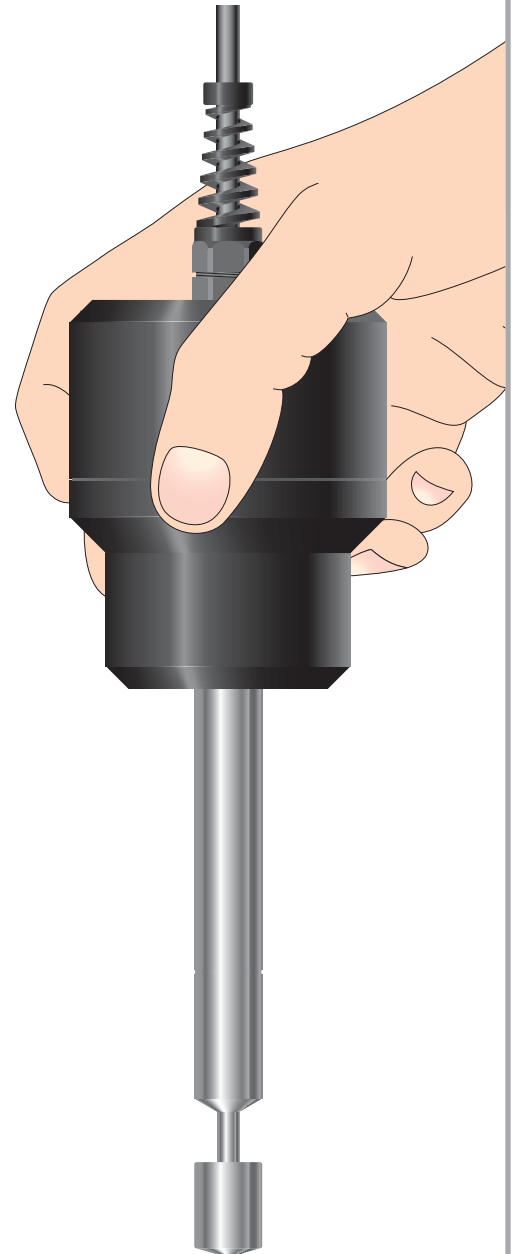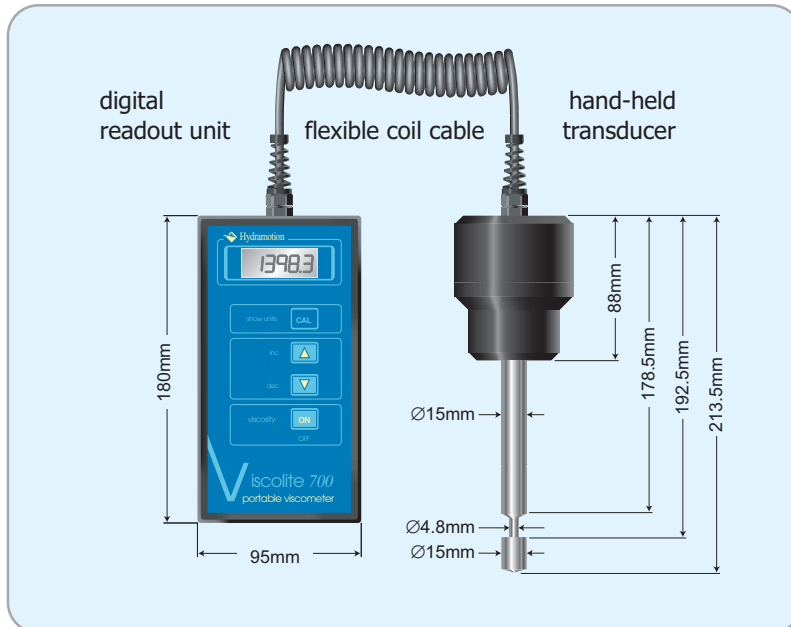

### Specification

#### Transducer

Viscosity Accuracy:	±2% of reading
Complete Viscosity Range:	0 to 5000cP
Minimum sample volume:	15 mL
Temperature Range (sensor):	-20°C to 120°C
Overall length:	213.5mm
Weight:	700g
Materials:	316 stainless steel - wetted parts Acetal - enclosure
Environmental Rating:	IP65
Safety Certification:	Safe Area

#### Signal Processor

Processor Unit:	HP550
Environmental Rating:	IP65
Weight:	500g
Power Supply:	4 x AA (or equivalent) alkaline cells
Accessories:	• Carrying case • Integral temperature probe and viscosity correction

Options:      • Highly polished sensing surface

**Hydramotion Ltd**  
1 York Road Park,  
Malton, York,  
England YO17 6YA

tel: +44 (0) 1653 600294  
fax: +44 (0) 1653 693446  
mail@hydramotion.com  
[www.hydramotion.com](http://www.hydramotion.com)