Glass Tip Pipette

Nichipet ECO

- ■The accuracy and precision of a micropipette with the stability and reliability of glass tips.
- ■The glass tip enables bias free liquid handling for endocrine disruptor's analysis
- ■Four different sizes covering a wide volume range. (20µL to 10mL)
- ■Glass tip is secured to the unit with a double O-ring design.
- ■Comes with a PTFE nozzle and ceramic piston.






Specifications

Cat. No	Volume range(µL)	Increment (µL)	Accuracy(%)	Precision(%)	Usable tips
00-NPC-200	20 – 200	0.2	±6.0 - ±3.0	≦6.0 - ≦3.0	Glass Tip S
00-NPC-1000	100 – 1000	1.0	±5.0 - ±3.0	≦5.0 - ≦3.0	Glass Tip L
00-NPC-5000	1000 – 5000	10.0	±5.0 - ±3.0	≦5.0 - ≦3.0	Glass Tip X
00-NPC-10ML	1000 – 10000	50.0	±6.0 - ±3.0	≦6.0 - ≦3.0	Glass Tip Z

Glass tips

Cat. No	Volume range(µL)	Q'ty(box)
00-GLT-S	20 – 200	10
00-GLT-L	100 – 1000	10
00-GLT-X	1000 – 5000	10
00-GLT-Z	1000 – 10000	10

Further research into "Environmental Hormone" is strongly requested to clarify the precise cause and effect on the human system and wild living things. Glass tips rather than standard plastic pipette tips are more suitable for this research.

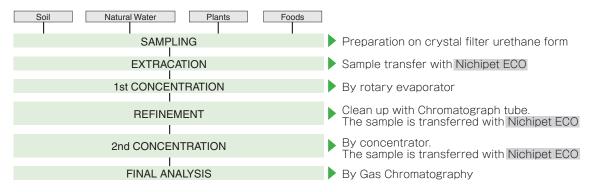

Variable Volume Macro Pipette

MODEL 3100

- ■Four different volume models from 1 mL to 10mL
- ■Light weight and slender body.
- ■Easy to operate.
- Liquid touches only disposable tip.
- ■PTFE piston ensures complete sealing of the syringe.

Two models, each volume settings. Volume change do spacer in the piper. Any special volume.

Variable Volume Ultra Macro Pipette

MODEL 5100

- ■Two models, each with three standard volume settings.
- Volume change done by placing a volume spacer in the pipette.
- ■Any special volume spacer between 15 to 25 mL for 5100S and 30 to 50 mL for 5100L is available for special order.

Specifications

Cat. No	Volume range(mL)	Increment (mL)
00-31N-1	0.2 – 1.0	0.1
00-31N-2	0.4 – 2.0	0.1
00-31N-5	1.0 – 5.0	0.5
00-31N-10	20 - 100	0.5

- Accuracy and Precision ± 1.0% / ≦ 1.0%
- Disposable tips

- Piopedable tipe			
Cat. No	Volume range(mL)	Cloror	Q'ty(bag)
00-MPT-1	0.2 – 1.0	Clear	1000
00-MPT-2	0.4 – 2.0	Clear	200
00-BMT-X	1.0 – 5.0	Clear	200
00-BMT-Z	2.0 – 10.0	Clear	200

Specifications

Cat. No	Volume setting(mL)		
00-5100S	15.0	20.0	25.0
00-5100L	30.0	40.0	50.0

- Accuracy and Precision ± 0.3% / ≤ 0.3%
- Disposable tips

Cat. No	Volume range (mL)	Q'ty(bag)	
00-51TS	25.0	5	
00-51TL	50.0	5	